

NEW



Features

- Fanless design with Intel® Celeron® J1900 CPU
- Aluminum die casting back cover
- Three different stands
- HDD easy maintenance design
- Optional MSR / i-Button / fingerprint / VFD / 2nd display
- Wall mountable VESA 100 x 100 standard

Specifications



Microsoft



System	CPU Support	Intel® Celeron® J1900
	Memory	DDR3L SO-DIMM (1 slot, up to 8GB)
	Network	10 / 100 / 1000 Ethernet
	Power Supply	60~90 watt power adapter
	Audio	2W speaker
	System Weight	Easy stand with power adaptor approx. 6 Kg
	Dimension	388 x 223 x 234 mm (45 degrees)
	View Angel	Easy stand: 30~50 degrees Normal stand: 0~70 degrees Printer stand: 0~55 degrees
	Color	Black
	O.S. Support	Windows7 / POSReady7 / Windows10 IoT Enterprise
Storage	SATA1	1 x 2.5" HDD or SSD
	SATA2	1 x SATA-DOM SSD
I/O Ports	USB	on rear 3 x USB 2.0, 1 x USB 3.0 on side bezel 1 x USB 2.0
	Serial Ports	3 + 1 (optional) x RJ45 (all support +5V / 12V selectable)
	LAN	1 x RJ45
	VGA	1 x DB15
	Cash Drawer	1 + 1 (option, with Y cable) x RJ11 (+12V or +24V selectable)
	DC-In	1 x 4pin DC power jack
	HDD Slot	1 x HDD maintenance slot
	DC Out	1 x 3P power connector only for Protech printer
Peripheral	Customer Display	VFD, 20 columns and 2 lines, each column is 5 x 7 dots
	Printer	2" or 3" easy loading thermal printer with auto cutter
	MSR & iButton	JIS-I or II, ISO Track1+2+3 (PS / 2 interface)
	2nd Display	Hang on back: 8" or 10.4" LCD Standalone: 15" LCD
Display	Fingerprint	8-bit grayscale, reader
	LCD	15" TFT LCD
	Resolution	1024 x 768
	Brightness	250 cd/m ²
	Touch Screen	Non bezel-free: 5-wire analog resistive Bezel-free: 5-wire analog resistive or projected capacitive
Environment	EMC & Safety	CE / FCC
	Operating Temp.	0 ~ 35°C
	Storage Temp.	-5 ~ 60°C
	Humidity	20 ~ 90%

*All information contained in this document is subject to change without prior notice. Please log on www.protech.com.tw to acquire latest information.


Highlights



Ordering Information

Order No	Description
PA-6722RA-A0B	Celeron® J1900 resistive touch panel PC
52-201-34220003	DDR3L 2GB memory
PA-6722RZ-21A	2.5" storage bracket kit
52-451-00110101	2.5" 320GB HDD
PA-6722RZ-32A	Easy stand kit
PA-6223RZ-51B	MSR, JIS-I or II, ISO Track1+2+3 (PS / 2)
TBD	Power cord

System I/O Ports



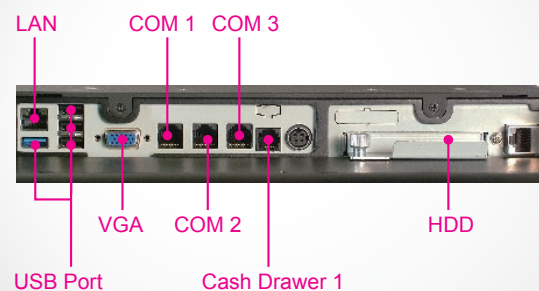


Applications

- Hospitality
- Food service




Dimensions

Easy Stand






Adjustable angle:
30~50

Normal Stand



Adjustable angle:
0~70

Printer Stand



Adjustable angle:
0~55

unit: mm